

NOTE: ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE

SF 01




NOTE: ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE

SF 02

NOTE: ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE

W01

FOR INFORMATION ONLY

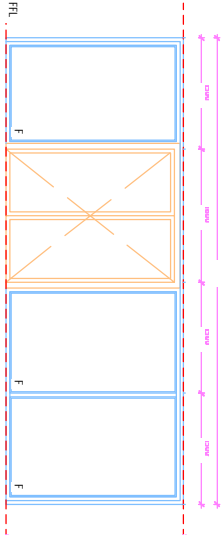

TYPE	SF01- SHOPFRONT	TYPE	SF02- SHOPFRONT	TYPE	W01- INTERNAL SLIDING WINDOW WITH FIXED PANEL
NUMBER REQUIRED	2	NUMBER REQUIRED	1	NUMBER REQUIRED	2 OFF
POSITION	GROUND FLOOR- AUCTION OPERATIONS MANAGER, MEETING ROOM	POSITION	GROUND FLOOR- RECEPTION	POSITION	GROUND FLOOR- GOOD RECEIVING OPERATIONS MANAGER'S OFFICE
DESCRIPTION	Extruded aluminum as above sketch with mitred corners to form close joints, fixed with stainless steel self tapping screws to AAMSA standards. All aluminum joints to be fully sealed with silicone. Whole unit to be sealed with silicone after installation to form water tight joint between bricework and frame. 150mm Sill Rail to all shop front doors and windows	DESCRIPTION	Extruded aluminum as above sketch with mitred corners to form close joints, fixed with stainless steel self tapping screws to AAMSA standards. All aluminum joints to be fully sealed with silicone. Whole unit to be sealed with silicone after installation to form water tight joint between bricework and frame. 150mm Sill Rail to all shop front doors and windows	DESCRIPTION	Extruded aluminum as above sketch with mitred corners to form close joints, fixed with stainless steel self tapping screws to AAMSA standards. All aluminum joints to be fully sealed with silicone. Whole unit to be sealed with silicone after installation to form water tight joint between bricework and frame. 150mm Sill Rail to all shop front doors and windows
FRAME	25 Micron powder coated charcoal grey aluminum frame in compliance with AAMSA regulations.	FRAME	25 Micron powder coated charcoal grey aluminum frame in compliance with AAMSA regulations.	FRAME	25 Micron powder coated charcoal grey aluminum frame in compliance with AAMSA regulations.
GLASS	'SmartGlass' 630mm Invisider Proof Normal Strength laminated safety glass or similar approved.	GLASS	'SmartGlass' 630mm Invisider Proof Normal Strength laminated safety glass or similar approved.	GLASS	4mm Monolithic annealed clear glass or similar approved
BEADING	Glazing in black vinyl gasket & aluminum glazing beads to match frame.	BEADING	Glazing in black vinyl gasket & aluminum glazing beads to match frame.	BEADING	Glazing in black vinyl gasket & aluminum glazing beads to match frame.
IRONMONGERY	As per ironmongery schedule.	IRONMONGERY	As per ironmongery schedule.	IRONMONGERY	As per ironmongery schedule.

NOTE: ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE




W03

NOTE: ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE

W02

NOTE: ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE


W04

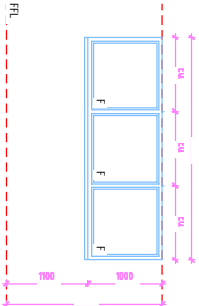

TYPE	W03- INTERNAL FIXED PANEL WINDOW	TYPE	W02- TOP HUNG WINDOW WITH FIXED PANEL	TYPE	W04-INTERNAL FIXED PANEL WINDOW
NUMBER REQUIRED	8 OFF	NUMBER REQUIRED	8 OFF	NUMBER REQUIRED	1 OFF
POSITION	GROUND FLOOR- SECURITY OFFICE, PAUSE AREA, AUCTION OPERATIONS MANAGER'S OFFICE	POSITION	GROUND FLOOR- CHANGEROOMS, PARAPETRIC WC, RISK BAYS	POSITION	MEZZANINE FLOOR- STEEL STAR
DESCRIPTION	Extruded aluminum as above sketch with mitred corners to form close joints, fixed with stainless steel self tapping screws to AAMSA standards. All aluminum joints to be fully sealed with silicone. Whole unit to be sealed with silicone after installation to form water tight joint between bricework and frame. 150mm Sill Rail to all shop front doors and windows	DESCRIPTION	Extruded aluminum as above sketch with mitred corners to form close joints, fixed with stainless steel self tapping screws to AAMSA standards. All aluminum joints to be fully sealed with silicone. Whole unit to be sealed with silicone after installation to form water tight joint between bricework and frame. 150mm Sill Rail to all shop front doors and windows	DESCRIPTION	Extruded aluminum as above sketch with mitred corners to form close joints, fixed with stainless steel self tapping screws to AAMSA standards. All aluminum joints to be fully sealed with silicone. Whole unit to be sealed with silicone after installation to form water tight joint between bricework and frame. 150mm Sill Rail to all shop front doors and windows
FRAME	25 Micron powder coated charcoal grey aluminum frame in compliance with AAMSA regulations.	FRAME	25 Micron powder coated charcoal grey aluminum frame in compliance with AAMSA regulations.	FRAME	25 Micron powder coated charcoal grey aluminum frame in compliance with AAMSA regulations.
GLASS	4mm Monolithic annealed clear glass or similar approved	GLASS	3mm Monolithic annealed obscure glass or similar approved.	GLASS	4mm Monolithic annealed clear glass or similar approved
BEADING	Glazing in black vinyl gasket & aluminum glazing beads to match frame.	BEADING	Glazing in black vinyl gasket & aluminum glazing beads to match frame.	BEADING	Glazing in black vinyl gasket & aluminum glazing beads to match frame.
IRONMONGERY	As per ironmongery schedule.	IRONMONGERY	As per ironmongery schedule.	IRONMONGERY	As per ironmongery schedule.

NOTE: ALL DIMENSIONS AND LEVELS TO BE VERIFIED ON SITE

W05



TYPE	W05- EXTERNAL SLIDING WINDOW WITH FIXED PANEL
NUMBER REQUIRED	3 OFF
POSITION	GROUND FLOOR- GUARD HOUSE
DESCRIPTION	Extruded aluminum as above sketch with mitred corners to form close joints, fixed with stainless steel self tapping screws to AAMSA standards. All aluminum joints to be fully sealed with silicone. Whole unit to be sealed with silicone after installation to form water tight joint between bricework and frame. 150mm Sill Rail to all shop front doors and windows
FRAME	25 Micron powder coated charcoal grey aluminum frame in compliance with AAMSA regulations.
GLASS	4mm Monolithic annealed clear glass or similar approved
BEADING	Glazing in black vinyl gasket & aluminum glazing beads to match frame.
IRONMONGERY	As per ironmongery schedule.

PRODUCT
ADDITIONS & ALTERATIONS TO PIER
STATE WAREHOUSE, GATE 5 BAYHEAD
ROAD, BAYHEAD.

OWNER'S SIGNATURE :
STEVE BIKO CAMPUS

SARS FACILITIES MANAGEMENT

TENDER DRAWINGS
WINDOW & SHOPFRONT SCHEDULE

SCALE: AS INDICATED
DATE: 20.03.2015
PROJECT NUMBER: K018
DRAWING NUMBER: WD 601

REVISION
K018

the creative
architects
Suite 1, Servo Station, 80 Greenbush Street, Lenasia, 1950
Tel: +27 11 854 9922 | Fax: +27 11 854 1743